

# Carbon Dioxide Fire Extinguisher

Perfect Fire Extinguishing  
With No Hazards



BEST FOR APPLICATION TO PRECISION MACHINES AND ELECTRICAL INSTALLATIONS



## HIGH PERFORMANCE CLEAN FIRE EXTINGUISHER

The use of inert gas (CO<sub>2</sub>), which completely evaporates, and hardly leaves any stain after fighting, is highly effective in factories of precision machinery, for electrical installation, substations, etc.

Model	YC-5XII	YC-7XII	YC-10XII	YC-15XII	YC-50
Gross Weight	Approx. 8.5 kg	Approx. 10.3 kg	Approx. 14.3 kg	Approx. 20.4 kg	Approx. 96.5 kg
Weight of Agent	CO <sub>2</sub> 2.4kg	CO <sub>2</sub> 3.2kg	CO <sub>2</sub> 4.6kg	CO <sub>2</sub> 6.8kg	CO <sub>2</sub> 23kg
Whole Height	Approx. 47.7cm	Approx. 56.4cm	Approx. 73.4cm (Exclude Hose)	Approx. 77.3cm (Exclude Hose)	Approx. 97cm
Fire Rating (Japanese Standard)	B - 1 • C	B - 2 • C	B - 3 • C	B - 4 • C	B - 6 • C
Discharge Time (at 20°C)	Approx. 14sec	Approx. 19sec	Approx. 21sec	Approx. 30sec	Approx. 40sec
Shooting Range (at 20°C)	2 to 4m	2 to 4m	2 to 5m	2 to 5m	2 to 5m
Stop Fuction	Yes	Yes	Yes	Yes	Yes



Trolley Type  
YC - 50

**CAUTION :**

- ☑ Be sure to refill immediately if the agent is discharged.
- ☑ Do not try a test discharge.

Products, specifications and features, as described or illustrated here, are subject to change without notice.

## YAMATO PROTEC CORPORATION

### TOKYO OFFICE.

17-2, Shirokanedai 5-chome, Minato-ku, Tokyo 108-0071, Japan. Phone Tokyo (03) 3446-7151.  
Osaka, Nagoya, Sapporo, Sendai, Niigata, Oomiya, Yokohama, Shizuoka, Hokuriku, Hiroshima, Matsuyama, Fukuoka, Kagoshima/  
Osaka Factory, Center for Research & Development, Tokyo Transportation Center.



Agen Tunggal di Indonesia  
**PT PALMAS ENTRACO**  
Jl. K.H. Samanhudi 85, Jakarta Pusat 10710  
Telp. (021) 381 3811, Fax. (021) 380 2660  
e-mail : sales@palmas.co.id  
marketing.palmas@gmail.com  
Perusahaan Niaga Peralatan Pengaman Kebakaran



# Your Most Reliable Fire Extinguisher



Pastikan Yamato Protec Anda Asli & Baru



Kelas A : kayu, kertas, tekstil, plastik, karet  
Kelas B : Bensin, solar, minyak  
Kelas C : Listrik

# ABC Multipurpose Dry Chemical Fire Extinguisher Stored-Pressure Type


A CONFLAGRATION CAN BE PREVENTED BY QUICK FIRE FIGHTING WITH YAMATO PROTEC'S HIGH POWER EXTINGUISHERS.



- SPEEDILY EXTINGUISHES
- HIGH PERFORMANCE
- EASY OPERATION
- BEST FOR A FIRE IN AN OFFICE BLOCK, OFFICES, FACTORY, EXPLOSIVES AND COMBUSTIBLES.

Life Time Serbuk : 10 Tahun

## YA-10X / YA-10XD

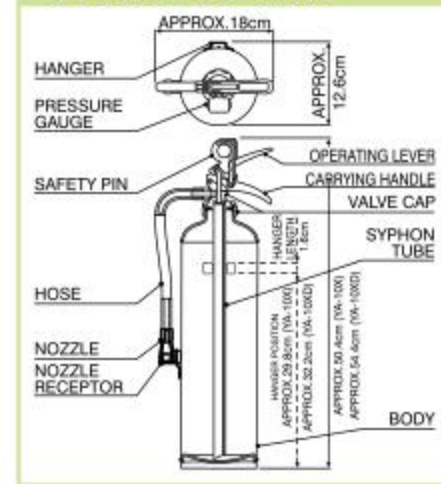

Daya Padam Paling Ampuh  
Service Life time : 10 tahun



YA-3X YA-10X YA-10XD YA-15X YA-20X

Model	YA-3X	YA-10X	YA-10XD	YA-15X	YA-20X
Gross Mass	Approx. 2.37kg	Approx. 5.13kg	Approx. 5.76kg	Approx. 7.40kg	Approx. 10.48kg
Agent Mass	1.0kg	3.0kg	3.5kg	4.5kg	6.0kg
Total Height	Approx. 37.5cm	Approx. 50.4cm	Approx. 54.4cm	Approx. 51.1cm	Approx. 55.8cm
Discharging Duration (at 20°C)	Approx. 12sec.	Approx. 13sec.	Approx. 17sec.	Approx. 19sec.	Approx. 20sec.
Shooting Range (at 20°C)	3-6m	4-7m	4-7m	3-7m	3-7m
Classification	A-1•B-2•C	A-3•B-7•C	A-3•B-7•C	A-4•B-10•C	A-5•B-12•C
Stop Function	Yes	Yes	Yes	Yes	Yes



### » Refill :

Apabila tabung telah dipergunakan, pastikan diisi dengan refill orisinal Yamato Protec, yang meliputi serbuk kimia kering ABC Yamato Protec dan komponen lainnya yang perlu diganti pada waktu pengisian seperti "Lock" Plastic Seal, Spindle, Valve Packing, orisinal Yamato Protec.

Serbuk Kering ABC Yamato Protec, mempunyai **DAYA PADAM TERBAIK** dengan **LIFE TIME SERBUK 10 TAHUN**

# ABC Multipurpose Dry Chemical Fire Extinguisher Wheeled Type



Life Time Serbuk : 10 Tahun

- ▶ Large Building
- ▶ Factory
- ▶ Dangerous Objects
- ▶ Gas Station
- ▶ ... Many Uses



Model	YA-50XIII	YA-100X
Gross Weight	37.5 kg	68.4 kg
Weight of Agent	20 kg	40 kg
Whole Height	90.4 cm	102.5 cm
Diameter of Body (O.D.)	23.4 cm	32.4 cm
Fire Rating (Japanese Standard)	A-10, B-20, C	A-10, B-20, C
Discharging Duration (at 20°C)	47 sec	90 sec
Shooting Range (at 20°C)	4-8 m	5-9 m
Stop Function	Yes	Yes



YA - 50XIII



YA - 100X

## Foam Fire Extinguisher



Bisa untuk Alcohol Fire  
Life Time Foam : 6 Tahun



Model	YFF-6EX	YFF-20
Gross Weight	11.9 kg	49.3 kg
Volume of Chemicals	6.0 L	20 L
Total Height	66 cm	97 cm
Discharge Time (at 20°C)	67 Sec	113 Sec
Shooting Range (at 20°C)	4-7 m	5-9 m
Fire Rating (Japanese Standard)	A-3, B-12	A-10, B-20
Stop Function	Yes	Yes



YFF - 6EX



YFF - 20

- Mechanical Foam Fire Extinguisher
- The main component of this device employs a surface acting agent to increase alcohol resistant.